


# MODEL 255 "C & HD" SELF CONTAINED GENERAL SPECIFICATIONS

Model 255	A	B	Model C Weight (Lbs)	Model HD Weight (Lbs)
17 cu.yd.	197"	100"	7,325	8,000
20 cu.yd.	215"	100"	7,625	8,350
25 cu.yd.	245"	100"	8,150	8,950
30 cu.yd.	278"	100"	8,700	9,600
35 cu.yd.	287"	106"	8,925	9,850

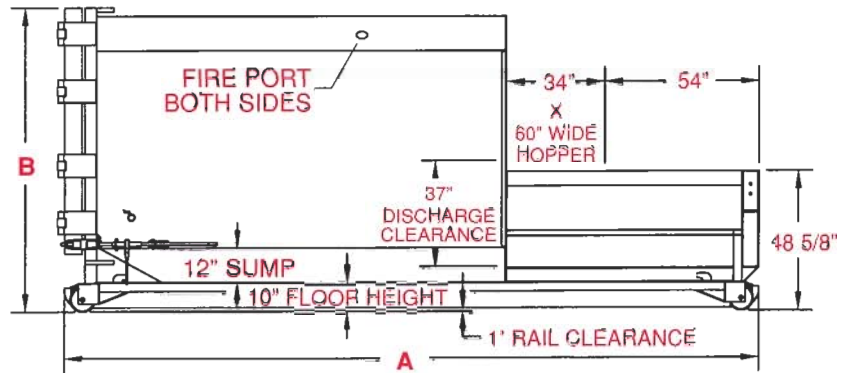

Compactor-Left Hand Side Shown-Front and Back Wheels (4) 73 1/2" O.D., 63 1/2" I.D.

## GENERAL SPECIFICATIONS

### Model 255C & 255HD Octagon Container/Packer

Compactor:	C	HD	Container:	C	HD
Manufacturer's Rating 2.00 Cu.Yd.	•	•	Capacity: 17/20/25/30/35 cu. yds.	•	•
WASTEC Rating 1.33 Cu. Yds.	•	•	Fire Ports (2)	•	•
Clear Top Opening 34" x 60"	•	•	6" x 2" x 1/4" Structural Tubes with Standard 36-1/2" ID understructure (C=3/16")	•	•
Packing Pressure PSI			Solid Steel Bullnoses	•	•
Normal 38,200 lbs.	1950	•	4" X 6" bullnose rollers with Grease Fittings	•	•
Normal 40,200 lbs.	2050	•	3" Structural Channel Sills	•	•
Maximum 45,100 lbs.	2300	•	Double End Pick Up	•	•
Cycle Time 34 seconds	•	•	Door fabricated of Structural Tubing and Plate	•	•
Container Full Light	•	•	4 Machine Slotted Hinges	•	•
Cylinder, 5" Bore, 2 1/2" Rod	•	•	4 Heavy Duty Wheels	•	•
Ram penetration - 6"	•	•	Fully Gasketed Door w/ Ratchet Binders	•	•
Floor Thickness	3/8"	1/2"	Watertight Welding, Factory Water Testing and Certification	•	•
Retainer Teeth on Breaker Bar	•	•	Rectangular - Optional	•	•
Motor 10 HP 208/230/460, 3 Phase, 60HZ	T E F C	T E F C	Non-Limit Switch Design	•	•
Reservoir (25 Gallons)	•	•			
Power Unit remote with 8' of hoses and Quick Disconnects	•	•			
Key Operated Start/Stop/Reverse	•	•			
Automatic Cycle Operation	•	•			

## STANDARD FEATURES

### Compactor/Container:

<b>WARRANTY:</b> HD - 3 Years Structural & Cylinder, 1 Year Components, 6 months Labor, C - 1 Year Components and 6 months Labor
<b>BOOST, OVER-RIDE/JOE CONTROL:</b> To Clear Compaction Chamber
<b>COMPACTION CHAMBER:</b> Hi-Strength Steel Plate; HD=1/2" and C=3/8" Floor Plate; Eliminates Need for Wear Strips or Rollers
<b>ELECTRIC COMPONENTS:</b> U.L. Approved; Locally Available
<b>ENERGY EFFICIENT TRI-VOLTAGE MOTORS:</b> 208/230/460
<b>HYDRAULIC COMPONENTS:</b> JIC Approved; Locally Available
<b>HYDRAULIC OIL:</b> 0° Low temperature oil w/quick disconnect drip pan
<b>HYDRAULIC POWER UNIT:</b> Remote Power Unit and Control Panel
<b>POWER UNIT COVER:</b> Weather Cover for Power Unit
<b>KEY OPERATED START:</b> Multi-Position Switch w/Packout Mounted on Power unit. HD Model key start is on 15" Sealtite. C Model on Panel
<b>LIGHTS:</b> Container Full Indicator with 15% boost pressure capacity when light comes on (HD Model only)
<b>TRASH GUARD:</b> Prevents trash from getting trapped under ram floor
<b>LOCKING SYSTEM:</b> Container Slam Latch Design with Binder
<b>DOOR:</b> Bubble style, Fully Gasketed; No center binder required
<b>CONTAINER PICK UP:</b> Double End
<b>BINDER:</b> Hinge side loop binder
<b>FIRE PORTS:</b> 2 - 3" ports, one each side at center of container

**NOTE:** Unless stated otherwise in writing, container sizes indicated on sales literature, invoices, price list, quotations, and delivery tickets are nominal sizes. Actual volume may vary from nominal sizes.




**DRIP PAN:** Eliminates oil spillage when hoses are disconnected for servicing or transportation



**REMOTE POWER UNIT WITH WEATHER COVER: (STANDARD)** Designed for easy maintenance.



**SLAM LATCH:** Simplified design for door locking procedures. Ease and convenience for one operator closure.

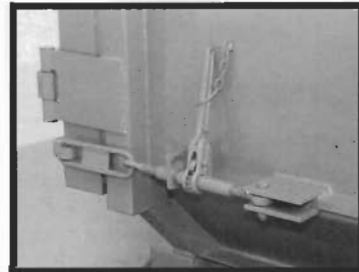

**HINGED SIDE RATCHET BINDER:** Loop style binder includes slotted hinges and positive door seal when tightened.

**WASTEQUIP  
ACCURATE**

1031 Hickstown Road • Erial, NJ 08081 • 800.220.2228 • 856.784.5500 • Fax: 856.346.9118  
5712 Lower Third Street • Alexandria, LA 71302 • 800.245.1147 • 318.445.8624 • Fax: 318.473.1893  
930 Massillon Road • Millersburg, OH 44654 • 800.831.3880 • 330.674.1119 • Fax: 330.674.3443

Distributor:



Printed On  
Recycled Paper

# SELF CONTAINED OCTAPAK

 **WASTEQUIP**  
**ACCURATE**

# MODEL 255 C/HD

 **WASTEQUIP**  
**ACCURATE**  
★ PROUDLY MADE IN THE USA ★



 **WASTEC**



*Manufacturing Compaction Equipment Since 1973*



**THROUGH THE WALL APPLICATION: Free Standing  
45° Side Chute • Waste Disposal from Inside Building**



**DOCK APPLICATION: Free Standing 45° Over the  
Rear Chute • Waste Disposal from Dock**

**WASTEQUIP ACCURATE FOCUSING ON CUSTOMER SATISFACTION**