

SELF CONTAINED OCTAPAK

 **WASTEQUIP**
ACCURATE

MODEL 265 X

 **WASTEQUIP**
ACCURATE
★ PROUDLY MADE IN THE USA ★



 **WASTECC**



Manufacturing Compaction Equipment Since 1973



THROUGH THE WALL APPLICATION: Free Standing 45° Side Chute • Waste Disposal from Inside Building




DOCK APPLICATION: Free Standing 45° Over the Rear Chute • Waste Disposal from Dock

WASTEQUIP ACCURATE FOCUSING ON CUSTOMER SATISFACTION

MODEL 265X SELF CONTAINED GENERAL SPECIFICATIONS

Model 265X	A	B	WEIGHT POUNDS
20 Cu. Yd.	197"	106"	8,500
25 Cu. Yd.	215"	106"	8,837
30 Cu. Yd.	245"	106"	9,450
35 Cu. Yd.	278"	106"	10,100
39 Cu. Yd.	302"	106"	10,500

CUSTOM SIZES AVAILABLE

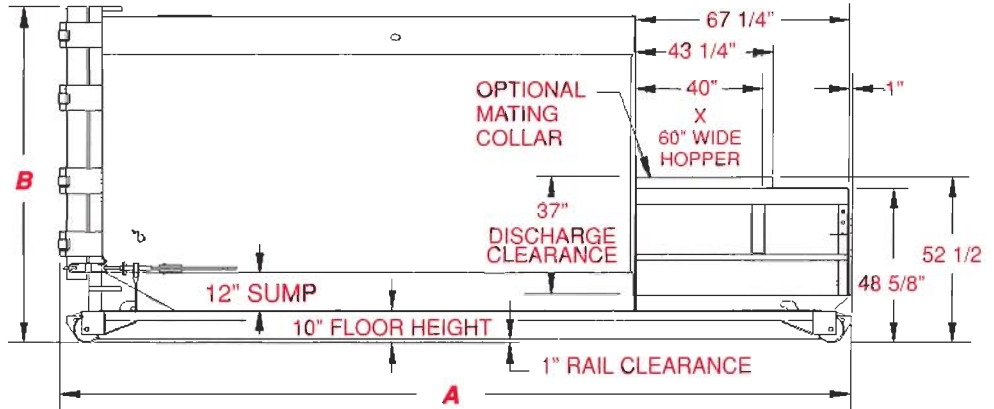

GENERAL SPECIFICATIONS

Model 265X Octagon Container/Packer

Compactor:	Container:
Manufacturer's Rating 2.00 Cu. Yd.	Capacity: 20/25/30/35/39 cu. yds.
WASTEC Rating 1.57 Cu. Yds.	Fire Ports (2)
Clear Top Opening 40" x 60"	6" x 2" x 1/4" Structural Tubes
Packing Pressure PSI	with Standard 36-1/2" ID understructure
Normal 39,800 lbs.	1850
Maximum 49,500 lbs.	2300
Cycle Time 31 seconds	Solid Steel Bullnoses w/ 4" x 6" rollers with Grease Fittings
Container Full Light	3" Structural Channel Sills
Cylinder, (2) 4" Bore	Double End Pick Up
Ram penetration - 5.88"	Door fabricated of Structural Tubing and Plate
Floor Thickness - 1/2"	4 Machine Slotted Hinges
Retainer Teeth on Breaker Bar	4 Heavy Duty Wheels
Motor 10 HP T.E.F.C.*	Fully Gasketed Door w/ Ratchet Binders
208/230/460, 3 Phase, 60HZ	Watertight Welding & Factory Water Testing and Certification
*Totally Enclosed, Fan Cooled	
Reservoir - 25 Gallons	Rectangular - Optional
Power Unit remote with 8' of hoses and Quick Disconnects	
Key Operated Start/Stop/Reverse	
Automatic Cycle Operation	
Non-Limit Switch Design	

NOTE: Unless stated otherwise in writing, container sizes indicated on sales literature, invoices, price list, quotations, and delivery tickets are nominal sizes. Actual volume may vary from nominal sizes.

STANDARD FEATURES

Compactor/Container:


- WARRANTY:** 3 Year Structural, 1 Year Components and 6 months Labor
- BOOST, OVER-RIDE/JOG CONTROL:** To Clear Compaction Chamber
- COMPACTION CHAMBER:** Hi-Strength Steel Plate; 1/2" Floor Plate; Eliminates Need for Wear Strips or Rollers
- ELECTRIC COMPONENTS:** U.L. Approved; Locally Available
- ENERGY EFFICIENT TRI-VOLTAGE MOTORS:** 208/230/460
- HYDRAULIC COMPONENTS:** JIC Approved; Locally Available
- HYDRAULIC OIL:** 0° Low temperature oil w/quick disconnect drip pan
- HYDRAULIC POWER UNIT:** Remote Power Unit and Control Panel
- POWER UNIT COVER:** Weather Cover for Power Unit
- KEY OPERATED START:** Multi-Position Switch w/Packout Mounted on Power unit. Key start is on 15' Sealtite.
- LIGHTS:** Container Full Indicator with 15% boost pressure capacity when light comes on.
- TRASH GUARD:** Prevents trash from getting trapped under ram floor
- LOCKING SYSTEM:** Container Slam Latch Design with Binder
- DOOR:** Bubble style, Fully Gasketed, No center binder required
- CONTAINER PICK UP:** Double End
- BINDER:** Hinge side loop binder
- FIRE PORTS:** 2 - 3" ports, one each side at center of container



DRIP PAN: Eliminates oil spillage when hoses are disconnected for servicing or transportation



REMOTE POWER UNIT WITH WEATHER COVER: (STANDARD) Designed for easy maintenance.

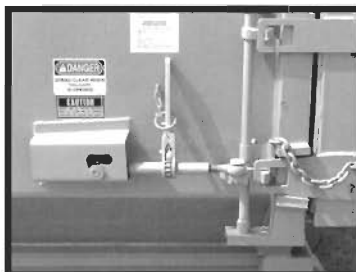

SLAM LATCH: Simplified design for door locking procedures. Ease and convenience for one operator closure.



HINGED SIDE RATCHET BINDER: Loop style binder includes slotted hinges and positive door seal when tightened.

Winter Equipment Corporation
614 Florence Street
Columbia, PA 17512

Toll Free: 800-472-4250
Phone: 717-681-0085
Fax: 717-681-0055



Printed On Recycled Paper